



KORAL LINE K580E

TYPE	Front-loading dishwasher
LINE	KORAL LINE
BASKET	500x500
SIZE	585x680x815h


The KORAL line is distinguished by its wide range of models suitable for any situation. Through the electronic card, the control system provides great customisation options based on your needs, allowing you to accurately adjust any parameter and ensure optimum washing results. The tempered glass UNIKO-MID lcd-touch display is extremely reliable and ensures optimum performance. Selecting one of the 4 wash cycles available is really simple and practical messages on the display will allow preserving the dishwasher life.

The K580E dishwasher proves to be the perfect solution even to remove stubborn dirt thanks to its powerful wash pump, ensuring a maximum productivity of 40 baskets/hour (540 dishes/hour); using the appropriate basket, you can insert GN 1/1 baking trays. The drain pump optional allows you to handle the drain automatically and perform a partial replacement of clean water at each wash.

The electronic control allows you to manage various parameters to give you an absolute customisation level and the continuous self-diagnosis allows you to minimise machine downtime, suggesting some operations to be verified. The self-cleaning cycle at the end of the day cleans the wash tank and empties the boiler from the hot water, preventing limestone forming inside. The standard double peristaltic electric rinse-aid and detergent dispenser ensures the best result from each wash cycle with great savings thanks to the precise dosage managed by the electronic card; whereas, the moulded washing and rinsing arms ensure great reliability and durability. The Thermo-stop function checks that washing and rinsing begin only when the desired temperature is reached. The bodywork is made entirely of AISI 304 steel and has been designed with all components in the front to allow easy technical assistance. Sturdy and reliable dishwashers to best deal with every moment of your day.

DISHWASHERS FEATURES	KORAL LINE K580E
Dimensions - (mm) L - P - H	585x680x815h
n° baskets/hour - (+55°C)	Max 40
Height glass max	310mm
Ø height plate max	350mm
Trays	GN1/1
Rinsing and washing arms	Ø18 INOX LOWER SEPARATED
Tank heating element - Tank capacity	2,6kW – 26lt
Boiler heating element - Boiler capacity	5,4kW – 7,3lt
Washing pump (kW-Hp)	0,89kW / 1,2Hp
Total power input / Current	6,29kW / 16A
Standard input voltage	400V3N+T 50Hz
Recommended inlet water temperature	+55°C
Water hardness	7÷10 °f
Water consumption per cycle (inlet suggested pressure 2 BAR)	2,0lt
Adjustable detergent and rinse-aid dispenser	ELECTRIC
STANDARD EQUIPMENT	
Cutlery insert	2
Basket for glasses dim.500x500x100mm	1
Basket for 18 dishes dim.500x500x100mm	1
ACCESSORIES	
UniKo touch display with iCloud Wi-Fi control	✓
Input voltage 230V/3+T	✓
Booster pump kit 0,5Hp	✓
Drain pump kit 40W	✓
Boiler heating element 4,5kW	✓
Boiler heating element 9kW	✓
Thermo/acoustic insulation double wall kit and upper cover	✓
Stainless steel tank filter kit for rack dishwasher 500x500	✓
Reverse osmosis system	-
Modular basket for wine glasses 500mm	✓
Basket for trays with 4 compartments dim.500x500x200mm	✓
Inclined basket for wine glasses dim.500x500x170mm	✓
Kit 4 Stainless steel feet 50-70mm	✓

K580E

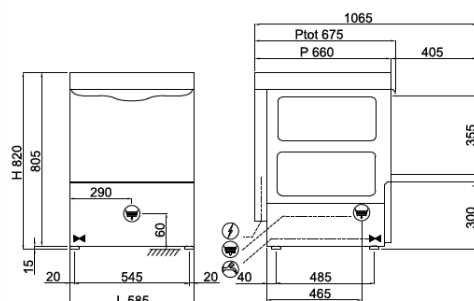

⚡ 400V3N+T 6,29kW
L=1900 (5 POLES)

🔧 G 3/4" M
L=1200

🗑️ Ø25x30
L=1500